




Ultrasonic Level Meters EMKOSONIC-43

- For continuous level measurement of liquids (even if polluted), mash and paste materials in open or closed vessels, sumps, open channels, drains, etc.
- Variants of level meter with adjustment by two buttons, or by magnetic pen
- Xi version for usage in explosive areas
- State indication by two LEDs
- Current output (4 ... 20 mA), voltage output (0 ... 10 V) or RS-485 Modbus output
- Wide choice of electric connection via connectors, cable glands or protective conductor
- Reception of reflected ultrasonic signal from level can be improved using horn adapter
- To mount the EMKOSONIC-43, you can use the VKD extendable bracket.

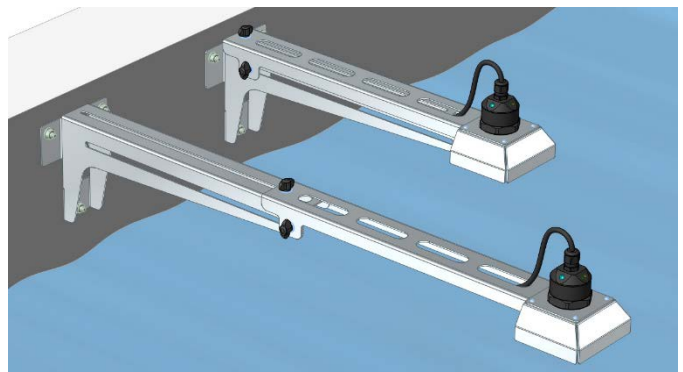

The **EMKOSONIC® ultrasonic level meters** are compact measurement devices containing an ultrasonic transmitter and an electronic module. Using an transmitter, level meters transmit the series of ultrasonic pulses that spread towards the level surface. The transmitter recuperates reflected acoustic waves that are subsequently processed in the electronic module. Based on the period during which the individual pulses spread towards the level and back, this period is averaged by the electronics that performs temperature compensation and subsequently a conversion to an output current 4 - 20 mA, voltage 0 - 10 V or output RS-485 Modbus.

Thanks to the contactless measuring principle ultrasonic level meters are suitable for continuous measurement or limit level sensing of liquids, waste water, sludge, suspensions, adhesives, resins in various open and closed vessels, sumps, open channels and drains. Use for organic solvents or substances, which contain organic solvents, should be consulted with the manufacturer. Usability for level measurement of solid materials is limited, there is a shorter measuring range. We recommend using the level meter for such a medium to consult with the manufacturer. Setting is carried out either using two buttons or a magnetic pen or by remote setting in case of Modbus RTU output. The device is equipped with optical indication of its state (RUN) and the setting process (STATE). It is manufactured in designs for normal (N) and explosive atmospheres (Xi).

Variants of sensors

- **EMKOSONIC –43_ –01_** measurement range **0.1 m to 1 m**, all-plastic design, source of PVDF (polyvinylidene fluoride), mechanical connection with thread G ¾.
- **EMKOSONIC –43_ –02_** measurement range **0.20 m to 2 m**, all-plastic design, source of PVDF, mechanical connection with thread G 1".
- **EMKOSONIC –43_ –06_** measurement range **0.20 m to 6 m**, all-plastic design, source of PVDF, mechanical connection with thread G 1 ½".
- **EMKOSONIC –43_ –10_** measurement range **0.4 m to 10 m**, all-plastic case, source of PVDF, mechanical connection with thread G 2 ¼".

EMKOSONIC –43_ –20_ measurement range **0.5 m to 20 m**, all-plastic case, source of PVDF, mechanical connection with flange of aluminium alloy.


Range of application

Thanks to the proximity principle employed, the devices are suitable for continuous measurement of the level of liquids, waste water, sludge, suspensions, adhesives, resins in various open and closed vessels, sumps, open channels and drains.


Applicability for measuring the surface level of loose materials is limited, the range of measurement is shorter there. We recommend that the suitability of the level meter for measuring bulk-solid materials is consulted with the manufacturer

Dimensional drawing


EMKOSONIC – 43 – 01

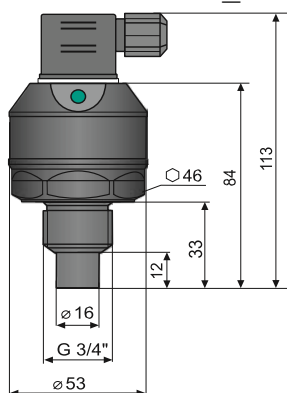


EMKOSONIC – 43 – 02

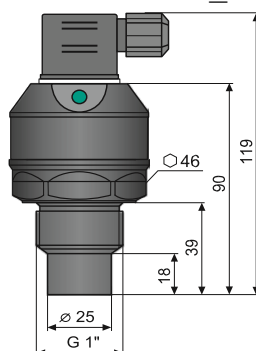


EMKOSONIC – 43 – 06

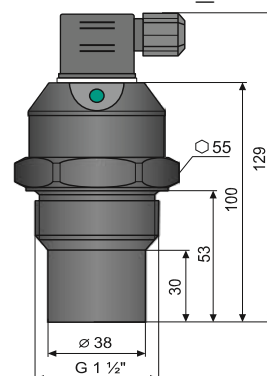


EMKOSONIC – 43 – 10

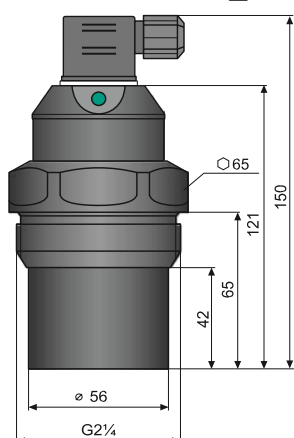


EMKOSONIC – 43 – 20

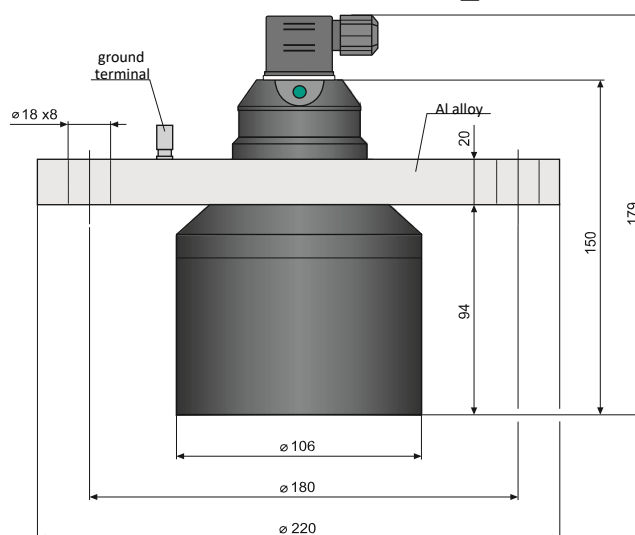


Variant "G" with connector ISO




Variant "C" with connector M12



Variant "B" with short cable terminal PG11



Variant "H" with outlet for protective conductor



Technical specifications		
Measuring range ¹⁾	EMKOSONIC-43_-01-_	0,1 ... 1 m
	EMKOSONIC-43_-02-_	0,2 ... 2 m
	EMKOSONIC-43_-06-_	0,2 ... 6 m
	EMKOSONIC-43_-10-_	0,4 ... 10 m
	EMKOSONIC-43_-20-_	0,5 ... 20 m
Supply voltage	EMKOSONIC-43N-_-_-	12 ... 36 V DC
	EMKOSONIC-43Xi-_-_-I	12 ... 30 V DC
Current supply	EMKOSONIC-43N(Xi)-_-_-I	4 ... 20 mA / max. 22 mA
	EMKOSONIC-43N-_-_-U	max. 12 mA
	EMKOSONIC-43N-_-_-M	max. 20 mA
Current output	EMKOSONIC-43_-_-I	4 ... 20 mA (limit values 3,9 ... 20,5 mA)
Voltage output	EMKOSONIC-43N-_-_-U	0 ... 10 V (limit values 0 ... 10,2 V)
Modbus output	EMKOSONIC-43N-_-_-M	Modbus RTU protocol
Resolution		< 1 mm
Accuracy (within the total range)	EMKOSONIC-43_-01 in area 0,1–0,2 m / 0,2–1,0 m	0,3 % / 0,2 %
	EMKOSONIC-43_-02,-06	0,15%
	EMKOSONIC-43_-10,-20	0,20%
Temperature error		max. 0,04 % / K
Beamwidth (-3 dB)	EMKOSONIC-43_-01-_-02-_-10-_	10°
	EMKOSONIC-43_-06-_	14°
	EMKOSONIC-43_-20-_	12°
Ambient temperature range	EMKOSONIC-43_-01-_-02-_-06-_	-30 ... +70 °C
	EMKOSONIC-43_-10-_-20-_	-30 ... +60 °C
Measuring period	EMKOSONIC-43_-01-_-02-_	0,5 s
	EMKOSONIC-43_-06-_-10-_	1,2 s
	EMKOSONIC-43_-20-_	5,0 s
	EMKOSONIC-43_-_-_-M	adjustable via Modbus RTU
Averaging (can be modified according to agreement)	EMKOSONIC-43_-_-_-	4 measurement ³⁾
Short time temperature stress resistance	EMKOSONIC-43_-_-_-M	adjustable via Modbus RTU
Max. operation overpressure (on transmission surface)		+90 °C / 1 hr
Max. internal values ²⁾ (for the Xi version only)		0,1 MPa
Failure indication	echo failure – basic mode	Ui=30 V DC; li=132 mA; Pi=0,99 W; Ci=370 nF; Li=0,9 mH
	echo failure – inverse mode	3,75 mA / 0 V / Modbus RTU
	level in dead zone ⁴⁾ – basic mode	22 mA / 10,5 V / Modbus RTU
	level in dead zone ⁴⁾ – inverse mode	22 mA / 10,5 V / Modbus RTU
Protection class	EMKOSONIC-43_-_-_-_-T	3,75 mA / 0 V / Modbus RTU
	EMKOSONIC-43_-_-_-_-G-M,L	IP67
	EMKOSONIC-43_-_-_-_-C-M,L	IP67 ⁵⁾
	EMKOSONIC-43_-_-_-_-B-M,L	IP68
	EMKOSONIC-43_-_-_-_-H-M,L	IP68
Recommended cable		PVC 2 x 0,75 mm ² (3 x 0,5 mm ² ; 2 x 2 0,25 mm ²)
Maximal current output load resistance	at U = 24 V DC	R _{max} = 270 Ω
	at U = 22 V DC	R _{max} = 180 Ω
	at U = 20 V DC	R _{max} = 90 Ω
Minimal voltage output load resistance		R _{min} > 1 kΩ
Delay between supply power rise time and first measurement	EMKOSONIC-43_-01-_-02-_-06-_	5 s
	EMKOSONIC-43_-10-_-20-_	9 s
Process connection	EMKOSONIC-43_-01-_	thread G ¾"
	EMKOSONIC-43_-02-_	thread G 1"
	EMKOSONIC-43_-06-_	thread G 1½"
	EMKOSONIC-43_-10-_	thread G 2¼"
	EMKOSONIC-43_-20-_	aluminium alloy flange
Weight	EMKOSONIC-43_-01-_	0,20 kg
	EMKOSONIC-43_-02-_	0,20 kg
	EMKOSONIC-43_-06-_	0,25 kg
	EMKOSONIC-43_-10-_	0,65 kg
	EMKOSONIC-43_-20-_	2,80 kg

¹⁾ In case the level of bulk-solid materials is measured, the measurement range is reduced.

²⁾ Allowed pressure range in the zone 0: 80 ... 110 kPa.

³⁾ From the last six measurements are taken out extreme values MAX and MIN, then the remaining four measurement was performed arithmetic average.

⁴⁾ Dead zone = blind zone = blocking zone.

⁵⁾ Protection class IP68 can be achieved when a special connector is used.

Working areas and area classification (under EN 60079-10 and EN 60079-14)

EMKOSONIC-43N-_-_-	Basic performance for non-explosive atmospheres.
EMKOSONIC-43Xi-01-I	Intrinsically safe explosion-proof performance for use in hazardous areas (explosive gas atmospheres) II 1/2G Ex ia IIB T5 Ga/Gb with intrinsically safe supply units 1), whole level meter zone 1, front head part 0.
EMKOSONIC-43Xi-02-I	
EMKOSONIC-43Xi-06-I	
EMKOSONIC-43_-10-_-I	Intrinsically safe explosion-proof performance for use in hazardous areas (explosive gas atmospheres) II 1/2G Ex ia IIA T5 Ga/Gb with intrinsically safe supply units 1), whole level meter zone 1, front head part 0.
EMKOSONIC-43_-20-_-I	Intrinsically safe explosion-proof performance for use in hazardous areas (explosive gas atmospheres) II 2G Ex ia IIA T5 Gb with intrinsically safe supply units 1), whole level meter zone 1.

1) Intrinsically safe isolating repeater (e.g. Dinel EPD-420).


Materials

sensor part	type variant	standard material
Housing	all	plastic PP
Electro-acoustic transducer	all	plastic PVDF
Flange	EMKOSONIC-43_-20	lacquered aluminum alloy
Cable gland	all	plastic PA


Electrical connection

Connection through ISO connector


The ULM level meter with a G type cable gland are connected to processing (display) units by means of a cable with an outer diameter of 6 to 8 mm (recommended wire cross-section 0.5 to 0.75 mm²), via a detachable ISO connector with inner screw terminals, which is part of the delivery. The connection diagram and the inner view of the connector are shown in Figures on the right. Non-detachable connector IP67 with PVC cable 5 m long can be supplied as an extra option.




View of the connector ISO

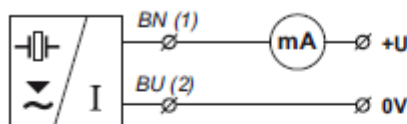

Connection diagram of the ULM level meter (variant -I) and inside view of the connector

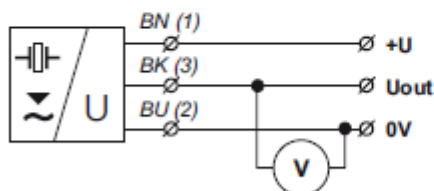


Connection diagram of the ULM level meter (variant -U) and inside view of the connector

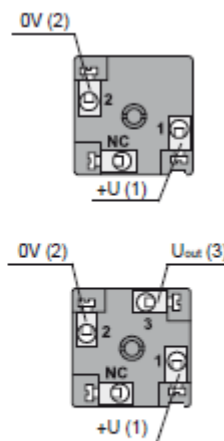


Connection through M12 connector


The ULM level meter with a C type cable gland are connected to processing (display) units by means of a cable with an outer diameter of 4 to 6 mm (recommended wire cross-section 0.5 to 0.75 mm²), via a connector socket with a moulded cable (2 or 5 m long) or via a detachable connector socket without a cable (see accessories), the connector is not basic part of the sensor. In this case connect the cable to the inner socket pins under figures on the right.




View of the connector M12



Inside view of the connector socket

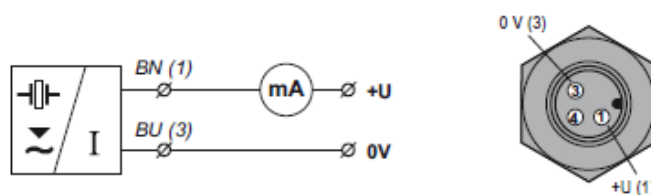


Connection diagram of the ULM level meter (variant -I) and inside view of the connector

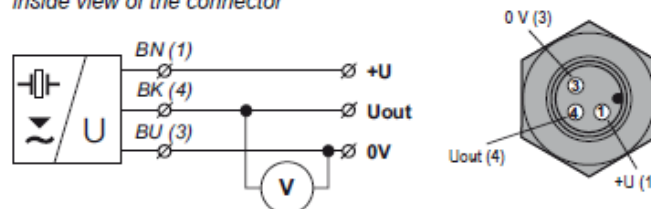


Connection diagram of the ULM level meter (variant -U) and inside view of the connector

Connection via PG 11 gland or gland for protective hoses

The ULM level meter with a B or H type cable gland are connected to processing (display) units by means of a fixed PVC cable 5 m long. PG 11 (B) or plastic bushings with a thread for protective hoses (H) can be used as a cable gland. Connection diagrams are shown in Figures on the right.




View of the cable gland PG11




View of the cable gland for protective hose



Connection diagram of the ULM level meter (variant -I) and inside view of the connector

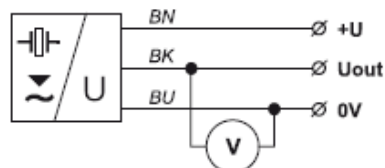

Connection diagram of the ULM level meter (variant -U) and inside view of the connector

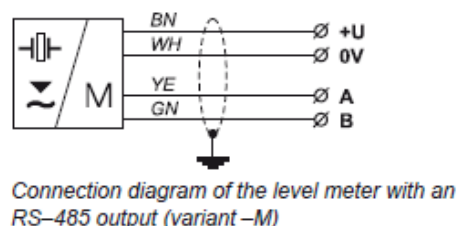

Connection diagram of the level meter with an RS-485 output (variant -M)

Legend:

BK – black
BN – brown
BU – blue
WH – white
YE – yellow
GN – green

Wiring operations shall only be carried out without voltage!

Taking into account the potential occurrence of electrostatic discharge on non-conducting parts of the level meter, it is necessary to ground the flange of level meters EMKOSONIC-43Xi-20-F, located in an explosive atmosphere, using a ground terminal! It is also necessary to design and take measures to reduce the effects of static electricity to a safe level in the wiring.

Installation in explosive atmospheres needs to be carried out in compliance with EN 60079-14 (Electrical installations for explosive gaseous atmospheres – Part 14: Electrical installations in dangerous areas other than mining) and possibly also in compliance with other standards relating to the area concerned.

The supply source should be preferably designed as a stabilized source of safe voltage 18 V to 36 V DC (max. 30 V DC for version Xi), which is part of the downstream processing or display system.

In case of strong ambient electromagnetic disturbance, parallel run of the input cable with the power line or its length exceeding 30 m, we recommend using a shielded cable.

Settings

Device type with setting using buttons

The measuring range is setup by means of two buttons "DOWN" and "UP". The "DOWN" button is used to enter to the setting mode (setting the 4 mA or 0 V limit) and to decrease the output current or voltage. The "UP" button as an opposite function (setting the 20 mA or 10 V limit and increasing the output current or voltage). Values are confirmed by simultaneous pressing of both buttons for about 1 sec. The setting process is indicated by yellow "STATE" LED indicator.

For detailed information please read at the instructions manual.




Key parts of the measuring device
(version with buttons)

Device type with setting using a magnetic pen

The measuring range is setup by touching of the magnetic pen to sensitive spots "EMPTY" and "FULL". The "EMPTY" spot is used to enter to the setting mode (setting the 4 mA or 0 V limit) and to decrease the output current or voltage. The "FULL" spot as an opposite function (setting the 20 mA or 10 V limit and increasing the output current or voltage). Values are confirmed by touching of the magnetic pen to the sensitive spot for about 3 sec. The setting process is indicated by yellow "STATE" LED indicator.

For detailed information please read at the instructions manual.

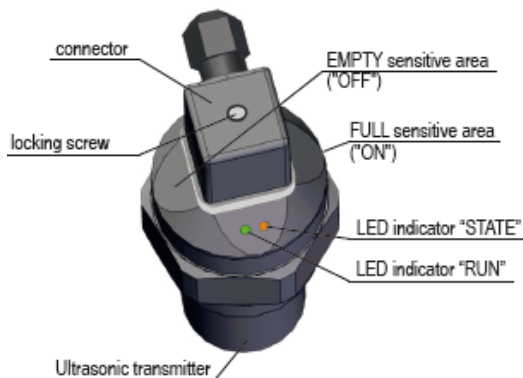

Key parts of the measuring device
(version with Hall probes)

Function and status indication

LED	Colour	Function
"RUN"	Green	short flashing (repeated depending on the measurement interval approx. 1 ... 2 s) - correct function, receipt of signal (echo) reflected from the measured surface fast flashing – the measured surface is in the dead zone of the level meter or the ultrasound transducer is dirty off – the level meter is not capable of receiving the echo. Incorrect installation or malfunction
"STATE"	Orange	Setting indication slow flashing – 4 mA (0 V) threshold setting indication fast flashing – 20 mA (10 V) threshold setting indication 3 short flashes – setting confirmation variant "M" with Modbus communications fast flashing – communication under way on line RS-485

Order code

PRODUCT									
EMKOSONIC-43									
PERFORMANCE									
N non-explosive areas									
Xi for explosive environments, can only be selected with output type I									
MAXIMUM RANGE									
01 0,10 ... 1 m, F process connection cannot be selected									
02 0,20 ... 2 m, F process connection cannot be selected									
06 0,20 ... 6 m, F process connection cannot be selected									
10 0,40 ... 10 m, F process connection cannot be selected									
20 0,50 ... 20 m, G process connection cannot be selected									
PROCESS CONNECTION									
G thread									
F flange									
OUTPUT TYPE									
I current output (4...20 mA)									
U voltage output (0...10 V)									
M RS-485 (Modbus RTU), G a C electrical connection cannot be selected and T a M.set-up elements cannot be selected									
ELECTRICAL CONNECTION									
G connector ISO									
C connector M12									
B short cable gland PG11									
H cable gland for protective hose									
SET-UP ELEMENTS									
T setting using buttons									
M setting using a magnetic pen (MP8)									
L no setting controls and LED									
ADJUSTABLE RANGE									
0002 ... 0010 in dm, output type M cannot be selected and T and M set-up elements cannot be selected									
0004 ... 0020 in dm, output type M cannot be selected and T and M set-up elements cannot be selected									
0006 ... 0060 in dm, output type M cannot be selected and T and M set-up elements cannot be selected									
0010 ... 0100 in dm, output type M cannot be selected and T and M set-up elements cannot be selected									
0020 ... 0200 in dm, output type M cannot be selected and T and M set-up elements cannot be selected									
CABLE									
K cable length in m, G and C electrical connection cannot be selected									
EMKOSONIC-43	N	/	20	/	F	/	U	/	H / M / K5
EXAMPLE OF CODING									

Safety, protections, compatibility and explosion proof

Level meter EMKOSONIC-43 is equipped with protection against electric shock on the electrode, reverse polarity, output current overload, short circuit and against current overload on output.

Protection against dangerous contact is provided by low safety voltage according to 33 2000-4-41. Electromagnetic compatibility is provided by conformity with standards EN 55011/B, EN 61326-1 and EN 61000-4-2 to 6.

Explosion proof EMKOSONIC-43Xi is provided by conformity with standards EN 60079-0:2007, EN 60079-11:2007, EN 60079-26:2007.

Explosion proof EMKOSONIC-43Xi is verified FTZÚ – AO 210 Ostrava – Radvanice: FTZÚ 09 ATEX 0119X.

A declaration of conformity was issued for this device in the wording of Act No. 90/2016 Coll., as amended. Supplied electrical equipment matches the requirements of valid European directives for safety and electromagnetic compatibility.

Special conditions for safe use of variants EMKOSONIC-43Xi

The device is designed for connection to the isolating repeater EPD-420. When the other approved supply unit is used, whose output parameters satisfy above mentioned output parameters, it is necessary to have a galvanic separation or, if supply unit without galvanic separation is used (Zener barriers), it is necessary provide potential equalization between sensor and point of barrier earthing.

For application in zone 0 the present explosive atmospheres - mixture of air with flammable gases, vapour or mists must comply:

- $20^{\circ}\text{C} < T_a < + 60^{\circ}\text{C}$; $0.8 \text{ bar} < p < 1.1 \text{ bar}$.

The device must be installed in such a way, to prevent mechanical damage of sensor face.

Maximum input parameters:

$U_i = 30 \text{ V}$; $I_i = 132 \text{ mA}$; $P_i = 0.99 \text{ W}$; $C_i = 370 \text{ nF}$; $L_i = 0.9 \text{ mH}$

Packings, shipping and storage

The EMKOSONIC-43 device is supplied packaged in a cardboard box that protects it against mechanical damage.

When handling and during transport, it is necessary to prevent impacts and falls.

The EMKOSONIC-43 electrical device must be stored in dry enclosed areas with humidity up to 85%, free of aggressive vapours at temperatures between -20°C and 60°C , and must be protected against the effects of weather.